


CMXT3090L
SURFACE MOUNT
LOW V_{CE} (SAT)
NPN SILICON POWER TRANSISTOR

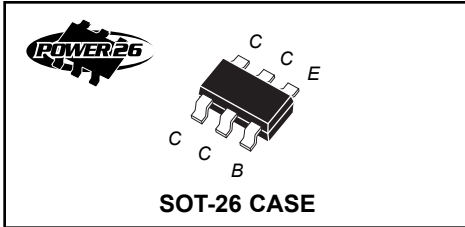

CentralTM

Semiconductor Corp.

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMXT3090L is a Low V_{CE} (SAT) NPN Transistor in a six lead Power SOT-26 surface mount package, designed for LAN cards, motor control, power management, strobe flash units and DC-DC converters for mobile systems.

MARKING CODE: X309L

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$)


	SYMBOL		UNITS
Collector-Base Voltage	V_{CB0}	45	V
Collector-Emitter Voltage	V_{CEO}	15	V
Emitter-Base Voltage	V_{EBO}	6.0	V
Continuous Collector Current	I_C	3.0	A
Peak Pulse Current	I_{CM}	6.0	A
Power Dissipation	P_D	350	mW
Operating and Storage			
Junction Temperature	T_J, T_{stg}	-65 to +150	$^\circ\text{C}$
Thermal Resistance	θ_{JA}	357	$^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_{CB0}	$V_{CB}=20\text{V}$			100	nA
I_{EBO}	$V_{EB}=5.0\text{V}$			100	nA
BV_{CB0}	$I_C=10\mu\text{A}$	45			V
BV_{CEO}	$I_C=10\text{mA}$	15			V
BV_{EBO}	$I_E=10\mu\text{A}$	6.0			V
$V_{CE(SAT)}$	$I_C=100\text{mA}, I_B=1.0\text{mA}$		30	50	mV
$V_{CE(SAT)}$	$I_C=1.0\text{A}, I_B=20\text{mA}$		60	150	mV
$V_{CE(SAT)}$	$I_C=2.0\text{A}, I_B=200\text{mA}$		85	200	mV
$V_{CE(SAT)}$	$I_C=3.0\text{A}, I_B=60\text{mA}$		145	300	mV
h_{FE}	$V_{CE}=2.0\text{V}, I_C=500\text{mA}$	200			
h_{FE}	$V_{CE}=2.0\text{V}, I_C=1.0\text{A}$	200			
h_{FE}	$V_{CE}=2.0\text{V}, I_C=3.0\text{A}$	175			
C_{ob}	$V_{CB}=10\text{V}, f=1.0\text{MHz}$			100	pF
f_T	$V_{CE}=10\text{V}, I_C=500\text{mA}$	100			MHz

R1 (18-November 2002)

SOT-26 CASE - MECHANICAL OUTLINE

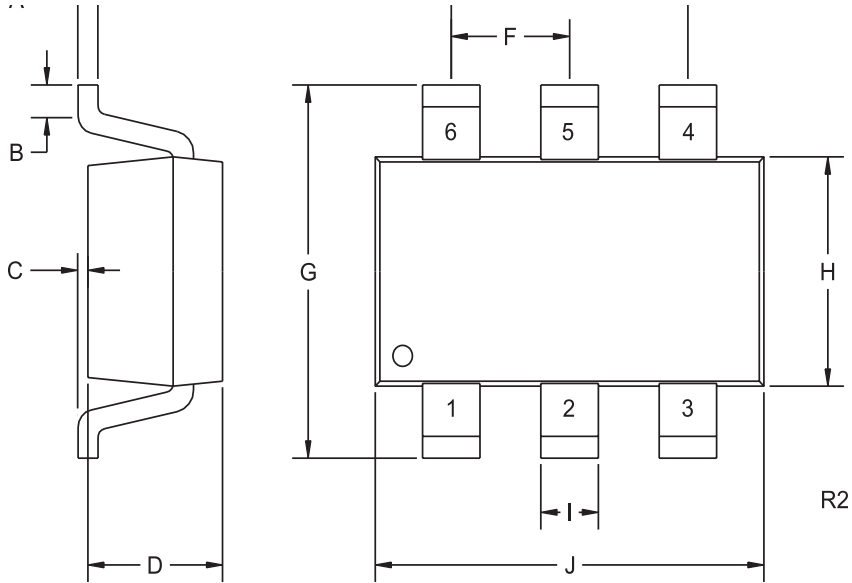


LEAD CODE:

- 1) COLLECTOR
- 2) COLLECTOR
- 3) BASE
- 4) EMITTER
- 5) COLLECTOR
- 6) COLLECTOR

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.004	0.007	0.11	0.19
B	0.016	-	0.40	-
C	-	0.004	-	0.10
D	0.039	0.047	1.00	1.20
E	0.074	0.075	1.88	1.92
F	0.037	0.038	0.93	0.97
G	0.102	0.118	2.60	3.00
H	0.059	0.067	1.50	1.70
I	0.016		0.41	
J	0.110	0.118	2.80	3.00

SOT-26 (REV: R2)



MARKING CODE: X309L

Pins 1, 2, 5 and 6 are common.

R1 (18-November 2002)