

NPN SILICON RF POWER TRANSISTOR

DESCRIPTION:

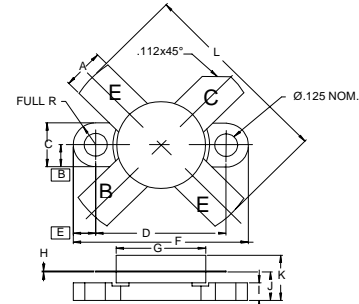
The **ASI FMB075** is Designed for Class C, FM Broadcast Applications up to 108 MHz.

FEATURES:

- Class C Operation
- $P_G = 10$ dB at 75 W/108 MHz
- **Omnigold™** Metalization System

MAXIMUM RATINGS

I_C	10 A
V_{CB}	60 V
V_{CE}	35 V
P_{DISS}	140 W @ $T_C = 25$ °C
T_J	-65 °C to +200 °C
T_{STG}	-65 °C to +150 °C
θ_{JC}	1.5 °C/W

PACKAGE STYLE .500 4L FLG


DIM	MINIMUM inches / mm	MAXIMUM inches / mm
A	.220 / 5.59	.230 / 5.84
B	.125 / 3.18	
C	.245 / 6.22	.255 / 6.48
D	.720 / 18.28	.730 / 18.54
E	.125 / 3.18	
F	.970 / 24.64	.980 / 24.89
G	.495 / 12.57	.505 / 12.83
H	.003 / 0.08	.007 / 0.18
I	.090 / 2.29	.110 / 2.79
J	.150 / 3.81	.175 / 4.45
K		.280 / 7.11
L	.980 / 24.89	1.050 / 26.67

ORDER CODE: ASI10587
CHARACTERISTICS $T_C = 25$ °C

SYMBOL	TEST CONDITIONS	MINIMUM	TYPICAL	MAXIMUM	UNITS
BV_{CEO}	$I_C = 50$ mA	35			V
BV_{CER}	$I_C = 50$ mA $R_{BE} = 10$ Ω	60			V
BV_{EBO}	$I_E = 10$ mA	4.0			V
I_{CES}	$V_E = 28$ V			5	mA
h_{FE}	$V_{CE} = 5.0$ V $I_C = 1.0$ A	10		100	---
C_{ob}	$V_{CB} = 28$ V $f = 1.0$ MHz			75	pF
P_G η_c	$V_{CC} = 28$ V $P_{OUT} = 75$ W $f = 108$ MHz	10	65		dB %